



Ultraleather® | Pro

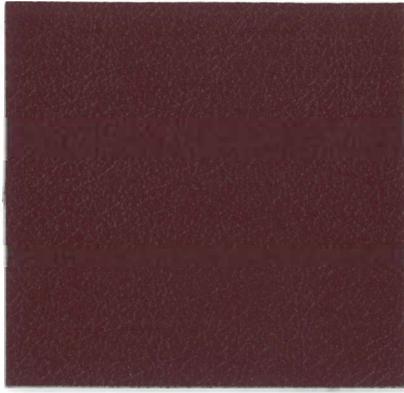

554-1357 Cranberry

Ultraleather® | Promessa®

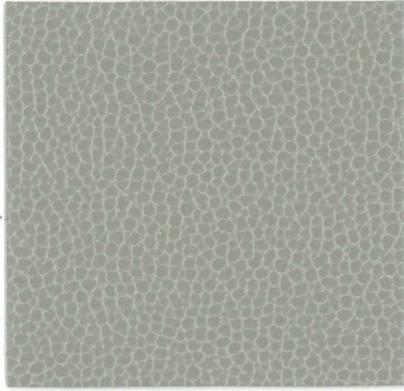

363-5818 Ash

Brisa® | Original & Distressed



533-4510 Celery

Brisa® | Fresco



544-3102 Grotto



554-0008 White Wash



554-3803 Parfait



554-3595 Cork



554-3444 Toasted Bagel



554-4530 Coastal



554-2711 Blueberry



554-3087 Woodcres



554-5648 Cloud



554-5626 Char



554-5618 Dark Knight



363-3152 Parchment



363-3463 Cocoa



363-3141 Fields



363-7273 Aspen Green



363-1387 Dogwood



363-3145 Bronze



363-2695 Aquamarine



363-2680 Atlantic



363-5817 Shale



363-5845 Ebony




533-5747 White



533-3863 Cream



533-3946 New Sand



535-3137 Saddle\*



535-3134 Buckskin\*



533-3823 Aztec



533-1373 Salsa



533-3913 Truffle



533-2645 Cambridge Blue



533-5820 Quicksilver



533-5749 Black Onyx



535-3974 Steerhide\*



544-3100 Whey



544-3101 Oatstraw



544-3105 Sepia



544-3197 Patina



544-2566 Azurite



544-5743 Peninsula



544-5752 Flint



544-5754 Peppercorn

\*Denotes Distressed

## SPECIFICATIONS

	<b>Ultraleather®   Pro</b> Antimicrobial protection Ink and denim resistant	<b>Ultraleather®   Promessa®</b> Antimicrobial protection	<b>Brisa®   Original</b> <b>Brisa®   Distressed</b> Breathable technology	<b>Brisa®   Fresco</b> Antimicrobial protection Breathable technology
<b>COMPOSITION:</b>	100% POLYURETHANE SURFACE	100% POLYURETHANE SURFACE	100% POLYURETHANE SURFACE	100% POLYURETHANE SURFACE
<b>WEIGHT:</b>	APPROX. 9.7 OZ. PER SQUARE YARD APPROX. 330 GRAMS PER SQUARE METRE	APPROX. 12 OZ. PER SQUARE YARD APPROX. 410 GRAMS PER SQUARE METRE	APPROX. 9.3 OZ. PER SQUARE YARD APPROX. 315 GRAMS PER SQUARE METRE	APPROX. 9.3 OZ. PER SQUARE YARD APPROX. 315 GRAMS PER SQUARE METRE
<b>THICKNESS:</b>	APPROX. 0.95 MM	APPROX. 1.1 MM	APPROX. 1.0 MM	APPROX. 1.0 MM
<b>WIDTH:</b>	54 INCHES / 137 CM			
<b>CHARACTERISTICS</b>				
<b>ABRASION:</b> (MEETS OR EXCEEDS)	ASTM D4157 / 500,000 DOUBLE RUBS* BS 2543 / 200,000 RUBS** *WYZENBEEK **MARTINDALE	ASTM D4157 / 400,000 DOUBLE RUBS* BS 2543 / 180,000 RUBS** *WYZENBEEK **MARTINDALE	ASTM D4157 / 300,000 DOUBLE RUBS* BS 2543 / 160,000 RUBS** *WYZENBEEK **MARTINDALE	ASTM D4157 / 300,000 DOUBLE RUBS* BS 2543 / 160,000 RUBS** *WYZENBEEK **MARTINDALE
<b>AIR PERMEABILITY:</b>	NA	NA	ASTM D737	ASTM D737
<b>ANTIMICROBIAL:</b>	ASTM E2180	ASTM E2180	NA	ASTM E2180
<b>SOUND ABSORPTION:</b>	NA	NA	ASTM C423	ASTM C423
<b>HYDROLYSIS:</b>	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)	14+ WEEKS ASTM D3690-02 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)
<b>ADHESION OF COATING:</b>	ASTM D751	ASTM D751	ASTM D751	ASTM D751
<b>TEAR STRENGTH:</b>	ASTM D2261	ASTM D2261	ASTM D2261	ASTM D2261
<b>BREAKING STRENGTH:</b>	ASTM D5034	ASTM D5034	ASTM D5034	ASTM D5034
<b>COLORFASTNESS</b>				
<b>CROCKING:</b>	AATCC 8, CLASS 5 WET & DRY			
<b>LIGHT:</b>	AATCC 16.3, 200 HOURS, GRADE 4-5 ISO 105 - B02 : 1999 GRADE 7/8	AATCC 16.3, 200 HOURS, GRADE 4-5 ISO 105 - B02 : 1999 GRADE 7/8	AATCC 16.3, 200 HOURS, GRADE 4-5 ISO 105 - B02 : 1999 GRADE 7/8	AATCC 16.3, 200 HOURS, GRADE 4-5 ISO 105 - B02 : 1999 GRADE 7/8
<b>F/R RATING (HFR FREE)</b>				
<b>F/R RATING:</b>	ASTM E84 (ADHERED) CLASS A CA TB 117-2013 PASS FMVSS 302 & 95/28 ANNEX IV PASS NFPA 260 CLASS 1 UFAC CLASS 1	ASTM E84 (ADHERED) CLASS A CA TB 117-2013 PASS FMVSS 302 & 95/28 ANNEX IV PASS NFPA 260 CLASS 1 UFAC CLASS 1	ASTM E84 (ADHERED) CLASS A CA TB 117-2013 PASS FMVSS 302 & 95/28 ANNEX IV PASS NFPA 260 CLASS 1 UFAC CLASS 1	ASTM E84 (ADHERED) CLASS A CA TB 117-2013 PASS FMVSS 302 & 95/28 ANNEX IV PASS NFPA 260 CLASS 1 UFAC CLASS 1

\* CAN BE TREATED TO MEET FAR SPECIFICATIONS.

\* THESE FABRICS, WHEN TREATED AND/OR USED WITH OTHER COMPATIBLE FURNITURE COMPONENTS, HAVE BEEN SHOWN TO PERFORM WELL UNDER THE FIRE TEST CONDITIONS OF CALIFORNIA TECHNICAL BULLETIN 133, ASTM E 84 (UNADHERED), BS 5852 SOURCE 5 ("CRIB 5"), BS 7175, BS 5867 PART 2 TYPE B, IMO A.652(16) AND NFPA 701.

## Maintenance & Care Instructions

- Clean with soap and water, or alcohol-based cleaners like Fantastik® and Formula 409®
- Disinfect using a 1:5 bleach/water solution
- Ultraleather® | Pro - for ink and tough stains, clean using isopropyl/rubbing alcohol
- Rinse all cleaning solutions with clean water

## Earth Friendly

- **GREENGUARD Certified**
  - Meets stringent VOC emission standards
  - Promotes healthier indoor air quality
  - Contributes towards satisfying credits under LEED® and level®, BIFMA
- Compliant with Prop 65
- Less than 100 ppm of antimicrobial treatment<sup>†</sup>
- No Conflict Minerals
- No Flame Retardants (ex. Halogenated, Brominated)
- No PBDEs (Polybrominated Diphenyl Ethers)
- No Plasticizers, Heavy Metals, Stabilizers, Phthalates or Bisphenol A (BPA)
- No POPs (Persistent Organic Pollutants)
- No PVC (Polyvinyl Chloride)
- No toxic by-products
- Over 99% of solvents recaptured and recycled

<sup>†</sup>Denotes Pro, Promessa®, and Fresco

## RFM Seating

619 SW Wood Street  
Hillsboro, OR 97123

T 800.447.5542 | F 800.734.6377

[www.rfmseating.com](http://www.rfmseating.com)

**RFM** seating

**GRADE G**  
**2016**

[www.ultrafabricsllc.com](http://www.ultrafabricsllc.com)

Ultrafabrics® and logo, Ultraleather®, Brisa®, Ultratech®, and Promessa® are trademarks of Ultrafabrics, LLC. Made in Japan.

**Uf**  
Ultrafabrics®